


**DX**

DX3

DECONTACTOR™ METAL**32 A
IP65**

TYPICAL CONFIGURATION

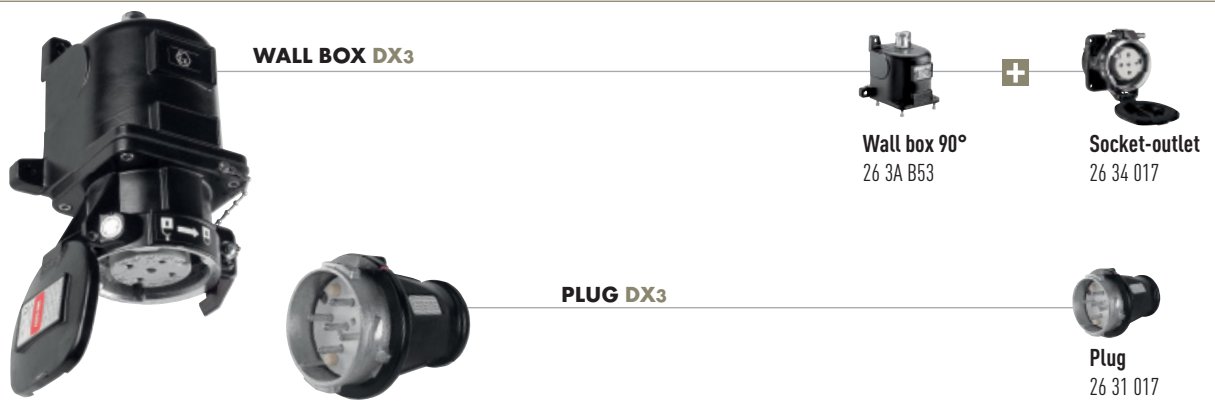

MAIN FEATURES

| | | | |
|---|------------------|---------------------------|--------------------------|
| Rated current (with wiring according to standard) | 32 A | Flexible wiring (min-max) | 2,5 - 10 mm ² |
| Maximum voltage | 750 V | Stranded wiring (min-max) | 2,5 - 10 mm ² |
| IP protection lid closed | IP65 | Other wiring | on request |
| IP protection connected plug | IP65 | Keying positions | 12 |
| Shock resistance | IK10 | Protection mode | de |
| Ambient temperature | -25 °C to +60 °C | ATEX zones | 1 & 2, 21 & 22 |

**SOCKET-
OUTLET** female
DX3 (32 A)**INCLINED
APPLIANCE INLET**
male **DX3 (32 A)****PLUG**
male
DX3 (32 A)EACH SOCKET OUTLET OR INLET
MUST BE ASSOCIATED WITH A
BOX, A SLEEVE OR A HANDLE.

| Voltage 50 Hz | Polarity | Part no. | Part no. | Part no. |
|---------------|----------|----------|----------|-----------------|
| 220 - 250 V | 1P+N+E | 2634015 | 2636015 | 9-16 mm 2631015 |
| 380 - 440 V | 3P+E | 2634013 | 2636013 | 9-16 mm 2631013 |
| 380 - 440 V | 3P+N+E | 2634017 | 2636017 | 9-16 mm 2631017 |

► Other voltages, frequencies and contact configurations are available (see page 10).

BOXESEx metal cable gland
included***Wall box
metal 90°****HANDLES**Ex metal cable gland
included***Straight handle
metal**

| Cable gland entry | Part no. | Cable gland entry | Part no. |
|-------------------|---------------------|-------------------|---------------------|
| M20 | 263AB5320M 8-13 mm | M20 | 263A95320M 8-13 mm |
| M25 | 263AB53 9-16 mm | M25 | 263A963 9-16 mm |
| M32 | 263AB5332M 12-21 mm | M32 | 263A95332M 12-21 mm |

* For alternatives with Earth continuity, please contact us

MARECHAL ELECTRIC MAROMME

Ex II 2 G D Ex de IIC tD A21
 -25 °C ≤ Ta ≤ +60 °C T5 T84 °C
 -25 °C ≤ Ta ≤ +50 °C T6 T74 °C
 IECEx LCI 09.0014 / LCIE 05 ATEX 6127

LOCKING

Locking position connected or disconnected by lockable shaft as standard.